






2EDGKBM-7.5
2EDGKBM-7.62

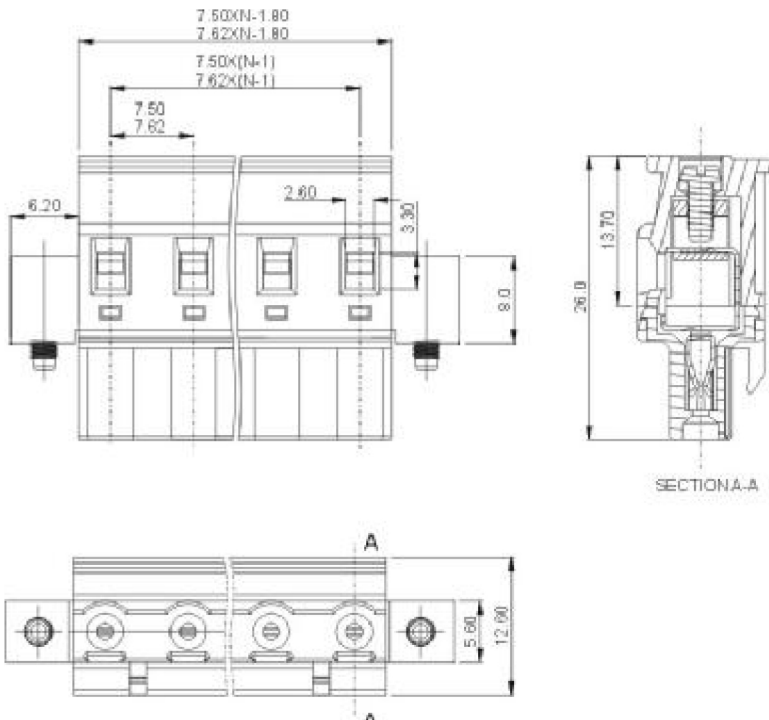

APPROVAL	 	
Electrical		
Standard	UL	IEC
Rated voltage	300V	400V
Rated current	15A	18A
Wire range	28-12AWG	2.5mm ²
Withstanding voltage	AC2500V/1Min	
Mechanical		
Torque	0.4Nm(3.5Lb-In)	
Ambient temperature	-40°C~+105 °C	
Strip length	7mm	
Dimensions		
Pitch	7.5mm(.295") 7.62mm(.300")	
Poles	2P-12P	
Material		
Housing	PA66,UL94 V-0	
Screws	M2.5,Steel,Cr ³⁺ Zn-plated	
Contact	Phosphor bronze	
Cage	Brass,Ni-plated	

HOW TO ORDER :

Ordering code structure: - **P** - 1 - X X X **Customer Request**

Series number:

No. of pole: 1 Single pitch
2 Double pitch

Color:

1 Grey	4 Green	7 Trans Parent
2 Blue	5 Orange	8 Yellow
3 Black	6 Red	9 White