





|                      |   |            |
|----------------------|---|------------|
| <b>APPROVAL</b>      |   |            |
| <b>Electrical</b>    |   |            |
| Standard             | <b>UL</b>   | <b>IEC</b> |
| Rated voltage        | 300V  | 320V       |
| Rated current        | 15A   | 10A        |
| Withstanding voltage | AC2500V/1Min  |            |
| <b>Mechanical</b>    |   |            |
| Ambient temperature  | -40°C~+105 °C   |            |
| <b>Dimensions</b>    |   |            |
| Pitch                | 5.0mm(.197" ) 5.08mm(.200" )  |            |
| Poles                | 2*(2P ,3P-24P)  |            |
| <b>Material</b>      |   |            |
| Housing              | PA66,UL94 V-0   |            |
| Pin header           | Brass,Tin plated  |            |



### HOW TO ORDER :

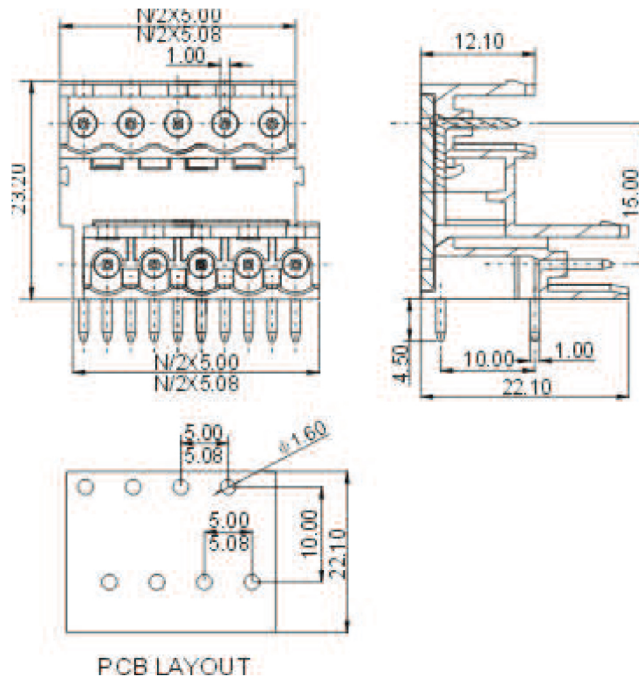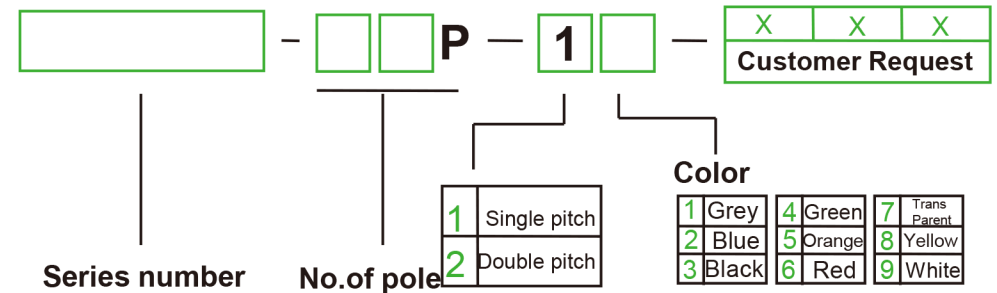

|   |  |
|---|--|
|  |  <b>China · Kang Wei electronics co., LTD</b> |
|  | <b>NAME</b><br>2EDGRT-5.0 2EDGRT-5.08  |