



APPROVAL		
Electrical		
Standard	UL	IEC
Rated voltage	150V	250V
Rated current	4A	5A
Rated impulse voltage	2.5KV	
Mechanical		
Ambient temperature	-40°C~+105 °C	
Dimensions		
Pitch	2.5mm(.098")	
Poles	2P-12P	
Material		
Housing	PA66,UL94V-0	
Pin header	Brass,Tin-plated	

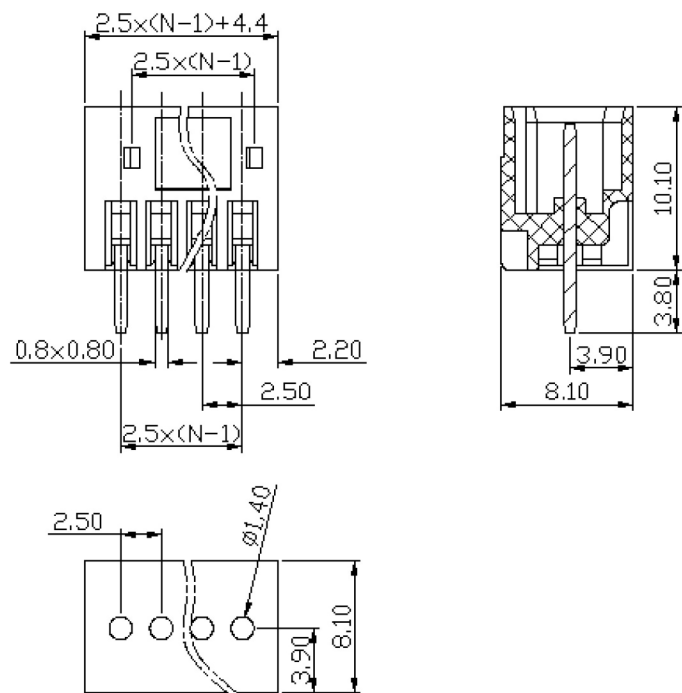

HOW TO ORDER :

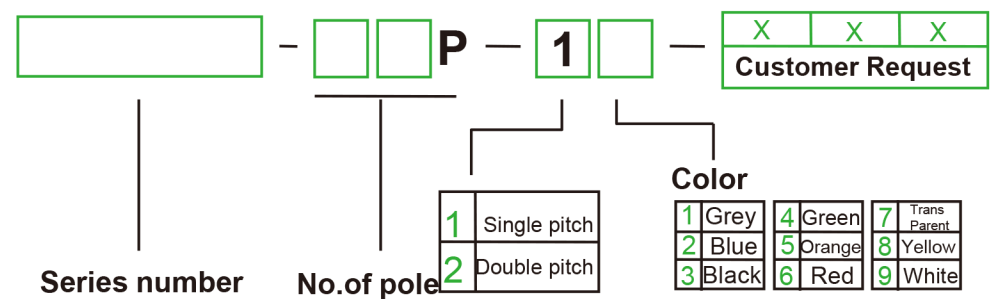

mm (INCH)	China · Kang Wei electronics co., LTD
THROANGLE PROJECTION	NAME 15EDGVC-2.5