



<b>APPROVAL</b>		
<b>Electrical</b>		
Standard	UL	IEC
Rated voltage	300V	320V
Rated current	15A	10A
Withstanding voltage	AC2500V/1Min	
<b>Mechanical</b>		
Ambient temperature	-40°C~+105°C	
<b>Dimensions</b>		
Pitch	5.0mm(.197" ) 5.08mm(.200" )	
Poles	2*(2P,3P -24P)	
<b>Material</b>		
Housing	PA66,UL94 V-0	
Pin header	Brass,Tin plated	

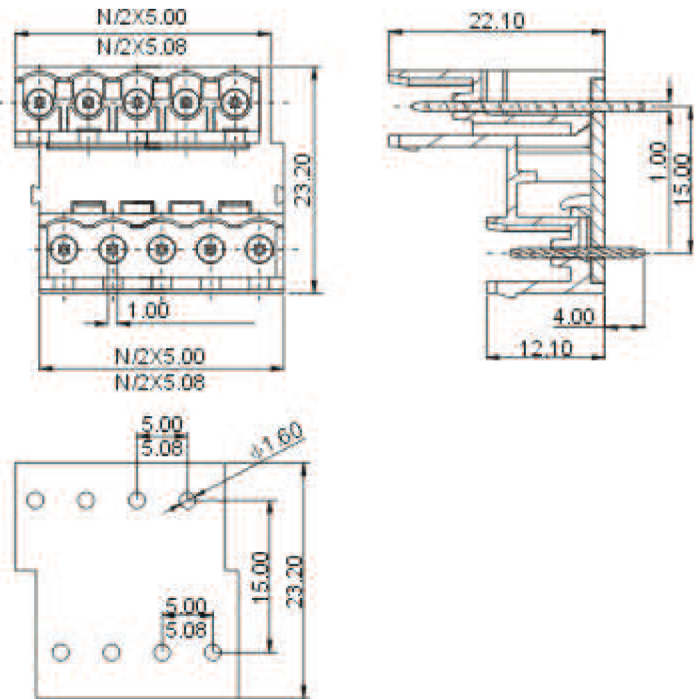

### HOW TO ORDER :

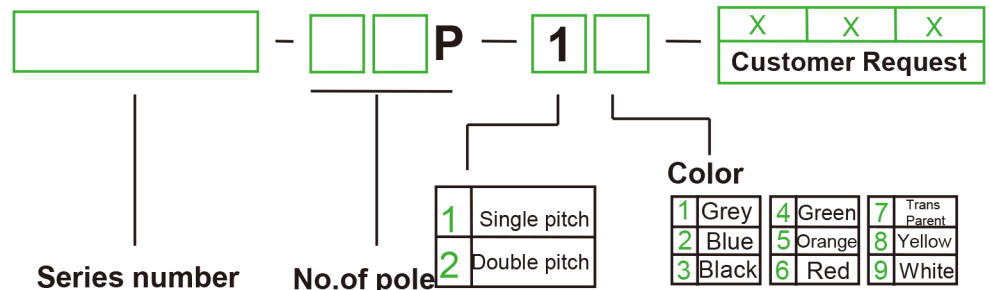

 mm (INCH)	 China · Kang Wei electronics co., LTD
 THIRD ANGLE PROJECTION	<b>NAME</b> <b>2EDGVT-5.0 2EDGVT-5.08</b>