

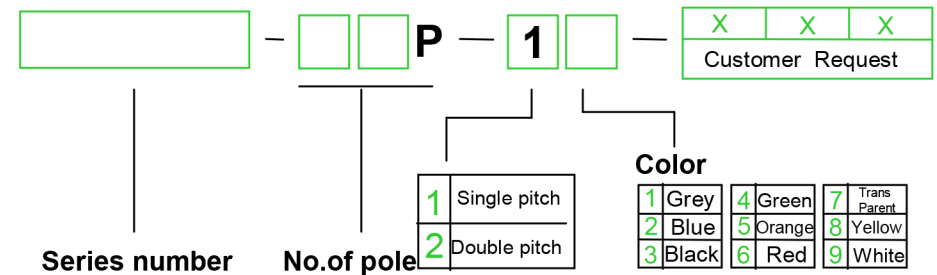


Approval		
Electrical		
Standard	UL	IEC
Rated voltage	300V	450V
Rated current	15A	17A
Wire range	28-12AWG	0.2-2.5mm ²
Withstanding voltage	AC2500V/1Min	
Mechanical		
Ambient temperature	-40°C~+105 °C	
Strip length	5-6mm	
Dimensions		
Pitch	5.0mm(.197") 5.08 (.200")	
Poles	1P-XXP	
Material		
Housing	PA66,UL94V-0	
Pin header	Phosphor bronze,Tin plated	
Wire guard	Stainless steel	

HOW TO ORDER :



 mm (INCH)	 China · Kang Wei electronics co., LTD
 THROANGLE PROJECTION	NAME 242R-5.0, 242R-5.08