




245-5.0
245-5.08



Approval

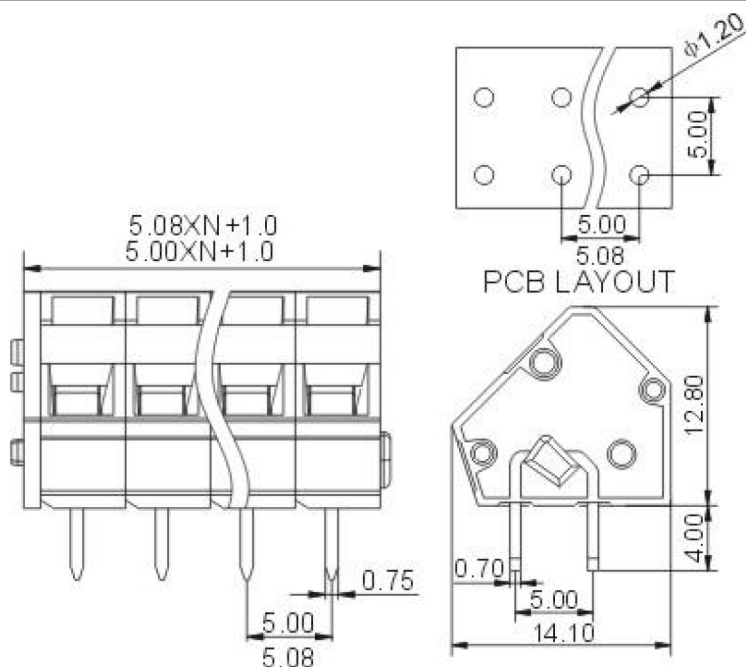

Electrical

Standard

Rated voltage

Rated current

Wire range

Withstanding voltage

UL

300V

15A

28-12AWG

/G	0.2-2.5mm ²
----	------------------------

AC2500V/1Min

Mechanical

Ambient temperature

Strip length

-40℃~+105℃

5-6mm

Dimensions

Pitch

Poles

5.0mm(.197") 5.08 (.200")

1P-XXP

Material

Housing

Pin header




Wire guard

PA66,UL94V-0

Phosphor bronze, Tin plated

Stainless steel

HOW TO ORDER :

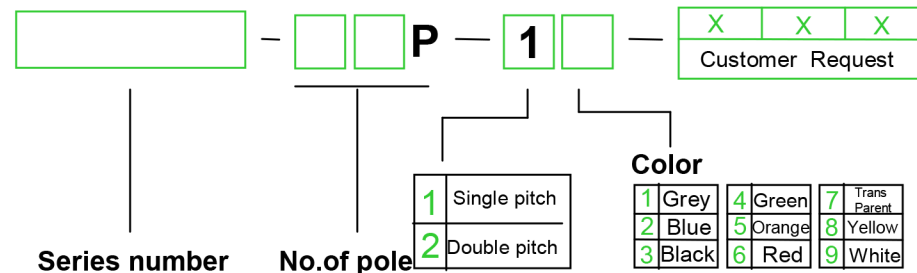

THIROANGLE PROJECTION



 China · Kang Wei electronics co., LTD

NAME _____

245-5.0, D 245-5.08