





# China · Kang Wei electronics co., LTD Product Specification



<b>Approval</b>	UL	CE
<b>Electrical</b>	<b>UL</b>	<b>IEC</b>
Standard	300V	450V
Rated voltage	20A	32A
Rated current	22-12AWG	4mm <sup>2</sup>
Wire range	AC1600V/1Min	
With standing voltage	500MΩ/DC500V	
Insulation Resistance		
<b>Mechanical</b>		
Max. Torque Value	0.5N.m 4.4Lb.in	
Ambient temperature	-40℃~+105℃	
<b>Dimensions</b>		
Pitch	8.25mm(.325")	
Poles	2P-24P	
<b>Material</b>		
Housing	PA66,UL94V-0	
Terminal	Brass,0.8t,Tin Plated	
Screws	Steel,M3 Ni Plated	

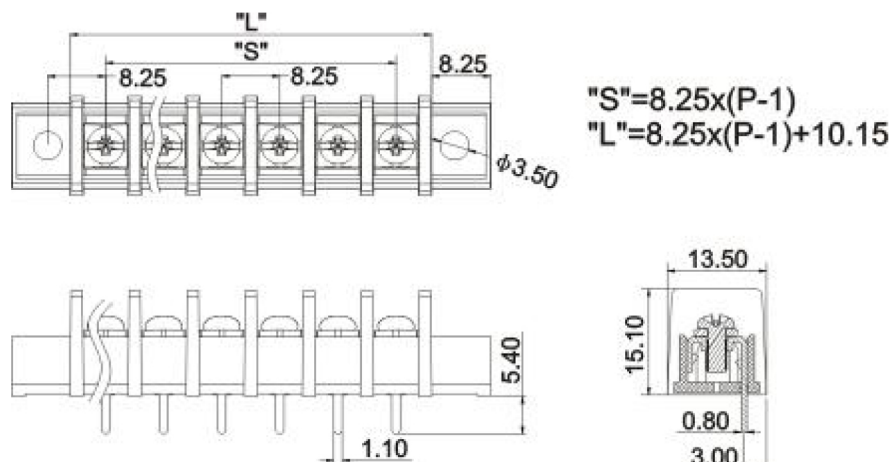

## HOW TO ORDER :

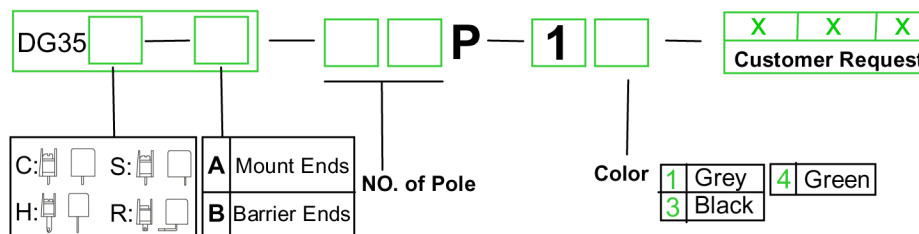

<b>Poles</b>	2	3	4	5	6	7	8	9	10	11	12	13	14	15
<b>L(mm)</b>	18.40	26.65	34.90	43.15	51.40	59.65	67.90	76.15	84.40	92.65	100.90	109.15	117.40	125.65
<b>S(mm)</b>	8.25	16.50	24.75	33.00	41.25	49.50	57.75	66.00	74.25	82.50	90.75	99.00	107.25	115.50
<b>Poles</b>	16	17	18	19	20	21	22	23	24	25	26	27	28	
<b>L(mm)</b>	133.90	142.15	150.40	158.65	166.90	175.15	183.40	191.65	199.90	208.15	216.40			
<b>S(mm)</b>	123.75	132.00	140.25	148.50	156.75	165.00	173.25	181.50	189.75	198.00	206.25			

	<b>China · Kang Wei electronics co., LTD</b>
<b>NAME</b>	<b>35S-A</b>