





<b>Approval</b>	UL US CE	
<b>Electrical</b>	<b>UL</b>	<b>IEC</b>
Standard	300V	250V
Rated voltage	15A	17.5A
Rated current	22-14AWG	2.5mm <sup>2</sup>
Wire range	AC2500V/1Min	
With standing voltage	500MΩ /DC500V	
Insulation Resistance	<b>Mechanical</b>	
<b>Mechanical</b>	Max. Torque Value 0.5N.m 4.4Lb.in	
Max. Torque Value	Ambient temperature -40℃~+105℃	
Ambient temperature	<b>Dimensions</b>	
<b>Dimensions</b>	Pitch 7.62mm(.300")	
Pitch	Poles 2*(4P-24P)	
Poles	<b>Material</b>	
<b>Material</b>	Housing PA66+23%GF,UL94V-0	
Housing	Terminal Brass,0.8t Tin plated	
Terminal	Screws Steel,M3 Ni plated	
Screws		

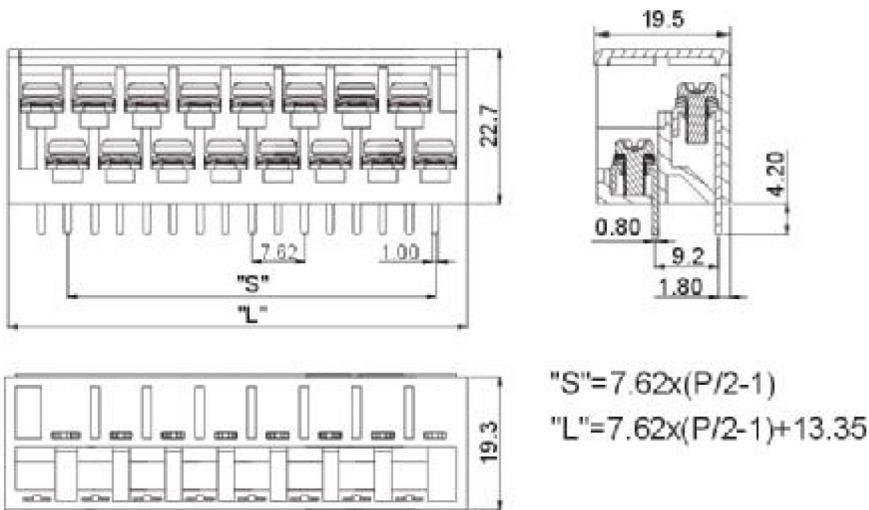

### HOW TO ORDER :

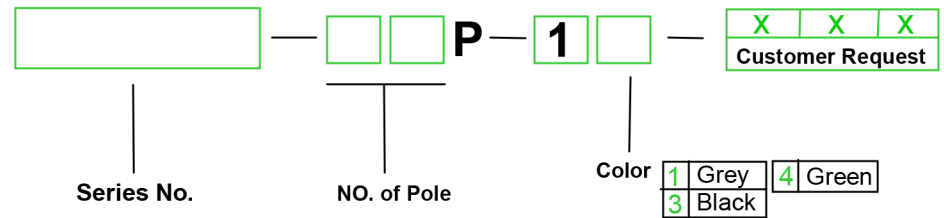

<b>Poles</b>	4	6	8	10	12	14	16	18	20	22	24	26	28	30
<b>L(mm)</b>	20.97	28.59	36.21	43.83	51.45	59.07	66.69	74.31	81.93	89.55	97.17	104.79	112.41	120.03
<b>S(mm)</b>	7.62	15.24	22.86	30.48	38.10	45.72	53.34	60.96	68.58	76.20	83.82	91.44	99.06	106.68
<b>Poles</b>	32	34	36	38	40	42	44	46	48					
<b>L(mm)</b>	127.65	135.27	142.89	150.51	158.13	165.75	173.37	180.99	188.61					
<b>S(mm)</b>	14.30	121.92	129.54	137.16	144.78	152.40	160.02	167.64	175.26					

	China · Kang Wei electronics co., LTD
THIRD ANGLE PROJECTION	<b>NAME</b> KV762S