

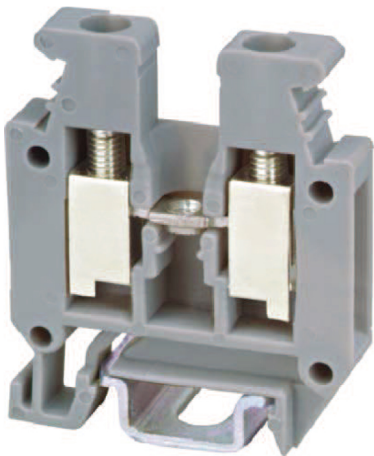





UKMB 4



Approval	c  US	
Electrical		
Standard	UL	IEC
Rated voltage	300V	500V
Rated current	30A	32A
Wire size	24-10AWG	0.2-4.0mm ²
T/W/End plate	6.2/26/1.5mm	
Height(NS35:7.5/NS35:15/NS32)	32mm	
Rated surge voltage/Contamination class	6KV/3	
Stripping length	8mm	
Screw thread/Tightening torque	M3/0.5N.m/4.5Lb-in	
Internal cylindrical gage	A4	
Insulating material/Inflammability class	PA/V-0	

HOW TO ORDER :

-

P

-

1

-

X

X

X

Customer Request

Series No.

No. of pole

Color

1 Gray	4 Green	7 Transp-arent
2 Blue	5 Orange	8 Yellow
3 Black	6 Red	9 white

mm (INCH)	 China · Kang Wei electronics co., LTD
THIROANGLE PROJECTION	NAME UKMB 4