


<b>Approval</b>	<b>CE</b>	
<b>Electrical</b>	<b>UL</b>	<b>IEC</b>
Standard	600V	800V
Rated voltage	30A	41A
Rated current	24-10AWG	0.2-6.0mm <sup>2</sup>
Wire size		
T/W/End plate		8/93/2.5mm
Height(NS35:7.5/NS35:15)		40/47.5mm
Rated surge voltage/contamination class		8KV/3
Stripping length		12mm
Insulating material/Inflammability class		PAV-0



### HOW TO ORDER :

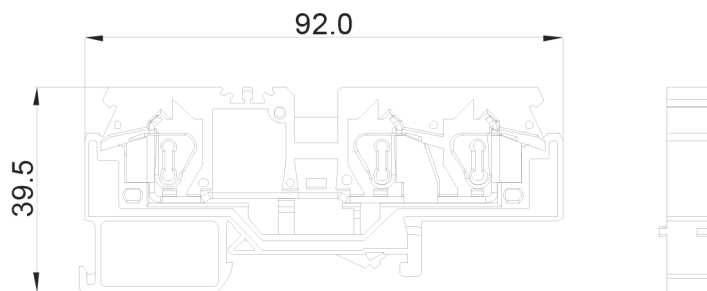

Series No.

No.of pole

Color

1 Gray	4 Green	7 Transp-arent
2 Blue	5 Orange	8 Yellow
3 Black	6 Red	9 white

 mm (INCH)	 China · Kang Wei electronics co., LTD
 THROANGLE PROJECTION	<b>NAME</b> <b>WD1-6B</b>