











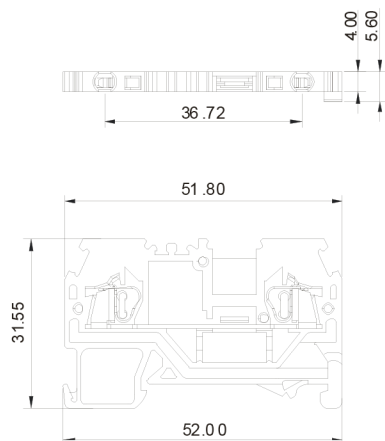


Approval	c  US 	
Electrical		
Standard	UL	IEC
Rated voltage	600V	800V
Rated current	10A	17.5A
Wire size	28-16AWG	0.2-1.5mm ²
T/W/End plate		4/5/2.5mm
Height(NS35:7.5/NS35:15)		34.5/42mm
Rated surge voltage/contamination class		8KV/3
Stripping length		10mm
Insulating material/Inflammability class		PAV-0

Specification	Model	Pieces
(1) Terminal block	WS 1.5	100
(2) Cover 	D-WS 1.5	100
(3) Adjacent jumper 	WFA-1.5	500
(4) Alternate jumper 	WFB-1.5	350
(5) Staggered jumper 		10
(6) Insulation stop 	TTA-1.5	200
(7) Protective warning marker 	EEA-1.5	100
(8) Test plug adapter 		
(9) Test plug 		
(9) Zack strip 	DEK4	100





HOW TO ORDER :

- P - -

X	X	X
Customer Request		

Series No. No. of pole Color

1 Gray	4 Green	7 Transp-arent
2 Blue	5 Orange	8 Yellow
3 Black	6 Red	9 white

China · Kang Wei electronics co., LTD

NAME WD1-1.5