


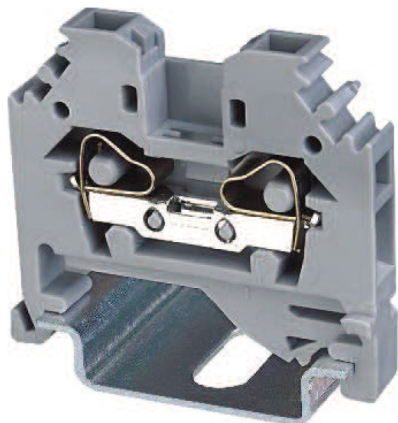

WD2-4

Approval

Electrical

Standard

Rated voltage

Rated current

Wire size

T/W/End plate

Height(NS35:7.5/NS35:15)

Rated surge voltage/contamination class

Stripping length

Insulating material/Inflammability class



UL

600V

20A

28-12AWG

IEC

800V

32A

0.2-4.0mm²


6/42.5/2.5mm

40/47.5mm

8KV/3

10mm

PA/V-0

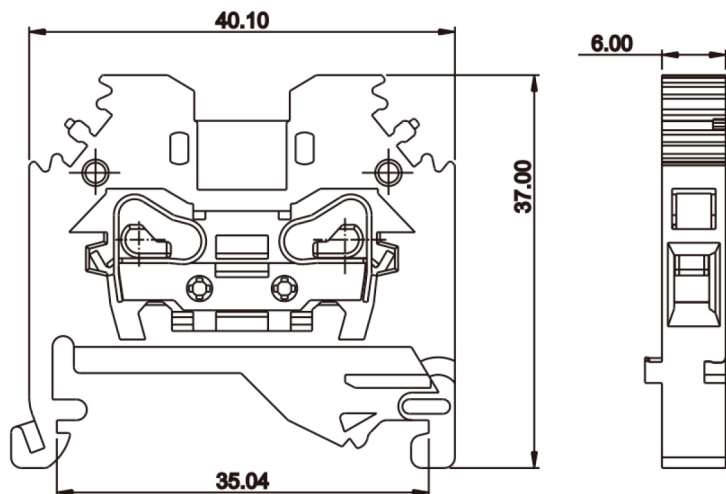

HOW TO ORDER :



Series No.

No.of pole

Color

1 Gray	4 Green	7 Transp-arent
2 Blue	5 Orange	8 Yellow
3 Black	6 Red	9 white



THIROANGLE PROJECTION



China · Kang Wei electronics co., LTD

NAME

WD2-4