
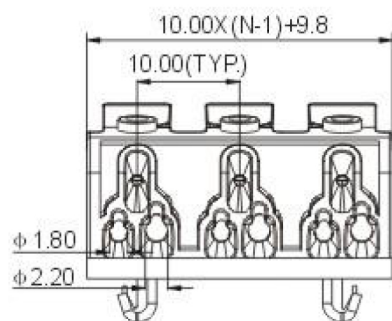





KV238-10.0



| Approval             |  |                         |
|----------------------|-------------------------------------------------------------------------------------|-------------------------|
| Electrical           |                                                                                     |                         |
| Standard             | UL                                                                                  | IEC                     |
| Rated voltage        | 600V                                                                                | 450V                    |
| Rated current        | 20A                                                                                 | 24A                     |
| Wire range           | 22-12AWG                                                                            | 0.75-2.5mm <sup>2</sup> |
| Withstanding voltage | AC2500V/1Min                                                                        |                         |
| Mechanical           |                                                                                     |                         |
| Ambient temperature  | -40℃~+105℃                                                                          |                         |
| Strip length         | 9-10mm                                                                              |                         |
| Dimensions           |                                                                                     |                         |
| Pitch                | 10.0mm(.394")                                                                       |                         |
| Poles                | 2P-5P                                                                               |                         |
| Material             |                                                                                     |                         |
| Housing              | PA66,UL94V-2                                                                        |                         |
| Pin header           | Copper,Tin plated                                                                   |                         |
| Wire guard           | Stainless steel                                                                     |                         |

### HOW TO ORDER :



|                      |   |                                                    |   |                                                    |   |                      |                      |                      |
|----------------------|---|----------------------------------------------------|---|----------------------------------------------------|---|----------------------|----------------------|----------------------|
| <input type="text"/> | - | <input type="text"/> <input type="text"/> <b>P</b> | - | <input type="text"/> <b>1</b> <input type="text"/> | - | <input type="text"/> | <input type="text"/> | <input type="text"/> |
|                      |   |                                                    |   |                                                    |   | X                    | X                    | X                    |
|                      |   |                                                    |   |                                                    |   | Customer Request     |                      |                      |

|                      |                                                                                                                     |   |              |   |              |
|----------------------|---------------------------------------------------------------------------------------------------------------------|---|--------------|---|--------------|
| <b>Series number</b> | <input type="text"/>                                                                                                |   |              |   |              |
| <b>No.of pole</b>    | <table border="1"> <tr> <td>1</td> <td>Single pitch</td> </tr> <tr> <td>2</td> <td>Double pitch</td> </tr> </table> | 1 | Single pitch | 2 | Double pitch |
| 1                    | Single pitch                                                                                                        |   |              |   |              |
| 2                    | Double pitch                                                                                                        |   |              |   |              |

|              |                                                                                                                                                                                                                            |                |         |                |        |          |          |         |       |         |
|--------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------|---------|----------------|--------|----------|----------|---------|-------|---------|
| <b>Color</b> | <table border="1"> <tr> <td>1 Grey</td> <td>4 Green</td> <td>7 Trans Parent</td> </tr> <tr> <td>2 Blue</td> <td>5 Orange</td> <td>8 Yellow</td> </tr> <tr> <td>3 Black</td> <td>6 Red</td> <td>9 White</td> </tr> </table> | 1 Grey         | 4 Green | 7 Trans Parent | 2 Blue | 5 Orange | 8 Yellow | 3 Black | 6 Red | 9 White |
| 1 Grey       | 4 Green                                                                                                                                                                                                                    | 7 Trans Parent |         |                |        |          |          |         |       |         |
| 2 Blue       | 5 Orange                                                                                                                                                                                                                   | 8 Yellow       |         |                |        |          |          |         |       |         |
| 3 Black      | 6 Red                                                                                                                                                                                                                      | 9 White        |         |                |        |          |          |         |       |         |

|                                                                                       |                                                                                                                                    |
|---------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------|
|  |  <b>China · Kang Wei electronics co., LTD</b> |
|  | <b>NAME</b> <b>KV238-10.0</b>                                                                                                      |