
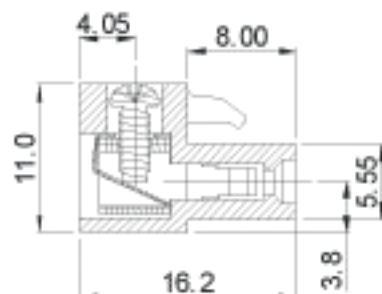







APPROVAL	 Certification Link	CE
	Electrical	
Standard	UL	IEC
Rated voltage	150V	320V
Rated current	12A	20A
Wire range	24-12AWG	2.5mm <sup>2</sup>
Withstanding voltage	AC2500V/1Min	
	Mechanical	
Torque	0.4Nm(3.5Lb-In)	
Ambient temperature	-40°C ~ +105°C	
Strip length	7mm	
	Dimensions	
Pitch	5.08mm(200')	
Poles	2P-24P	
	Material	
Housing	PA66,UL94V-0	
Screws	M2.5,Steel,Ni-plated	
Contact	Phosphor bronze	
Cage	Phosphor bronze,Ni-plated	



## HOW TO ORDER :






Series number

No. of pole

Color

1 Grey	4 Green	7 Trans. Paint
2 Blue	5 Orange	8 Yellow
3 Black	6 Red	9 White

	 China · Kang Wei electronics co., LTD
	<b>NAME</b> HT508K-5.08