








APPROVAL	 Certification Link	 Certification Link
	Electrical	
Standard	UL	IEC
Rated voltage	150V	250V
Rated current	8A	15A
Withstanding voltage	2000V/1Min	
	Mechanical	
Ambient temperature	-40°C ~ +105°C	
	Dimensions	
Pitch	3.96mm(156")	
Poles	2P-24P	
	Material	
Housing	PA66,UL94V-0	
Pin header	Copper,Tin plated	



HOW TO ORDER :

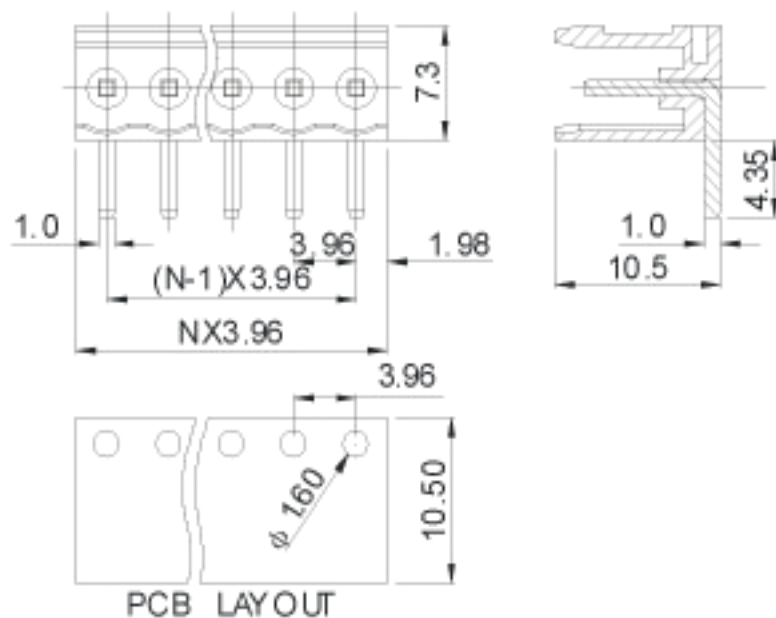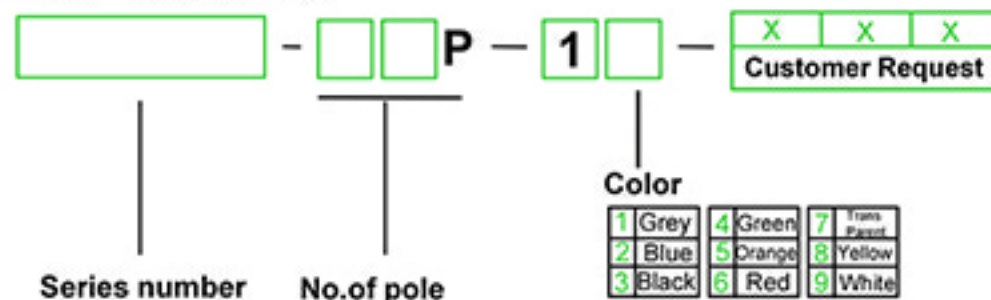

	 China · Kang Wei electronics co., LTD
	NAME HT396R-3.96