


Approval	c US	
Capability		
Standard	UL	IEC
Rated Voltage	-	-
Rated Current	-	-
Wire size	24-10AWG	0.2-4.0mm ²
T/W/End plate		6.2/42.5/-mm
Height(mm)(NS35:7.5/NS35:15/NS32)		47/54.5/52mm
Rated surge voltage/Contamination Class		8KV/3
Stripping length		8mm
Terminal screw: thread/torque		M3/0.5N.m/4.5Lb-in
Mounting screw: thread/torque		M3/0.5N.m/4.5Lb-in
Internal cylindrical gage		A4
Insulating Material/Inflammability class		PAV-0

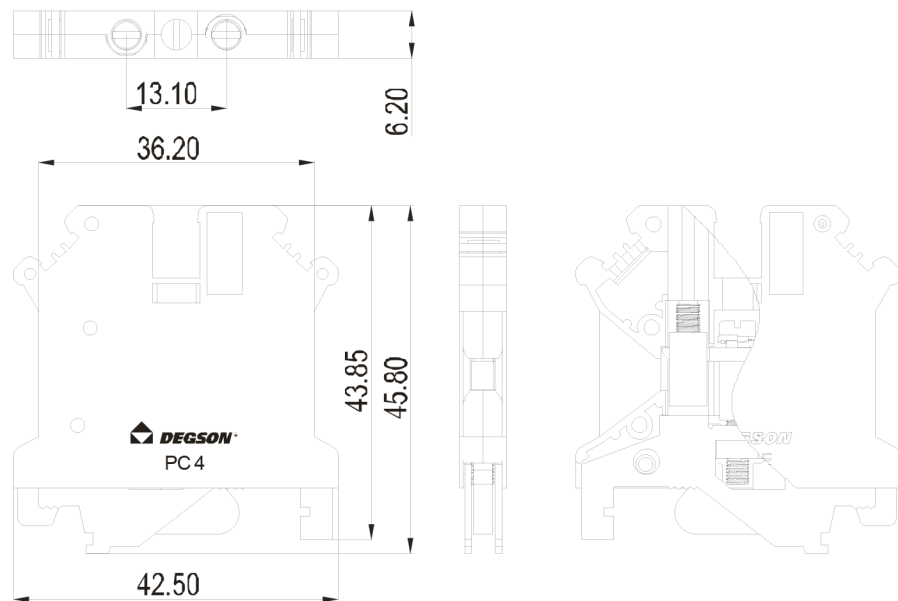

HOW TO ORDER :

- **P** - -

X	X	X
Customer Request		

Series No. No. of pole Color

1	Gray	4	Green	7	Transp-arent
2	Blue	5	Orange	8	Yellow
3	Black	6	Red	9	white

 mm (INCH)	China · Kang Wei electronics co., LTD
 THROANGLE PROJECTION	NAME UK5JD