

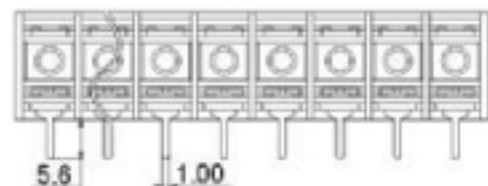


康伟栅栏式PCB接线端子

产品规格书




认证	UL	CE
电气性能		
参考标准	UL	IEC
额定电压	300V	450V
额定电流	20A	24A
导线线径	22-12AWG	2.5mm ²
耐电压		AC2000V/1Min
绝缘阻抗		500MΩ/DC500V
机械性能		
最大锁紧扭力		0.5N.m 4.4Lb.in
环境温度		-40℃~+105℃
尺寸		
间距		8.25mm(325")
极数		2P-22P
材质及电镀		
塑件		PA66, UL94V-0
端子		黄铜, 0.8厚 镀锡
螺丝		钢, M3镀锌

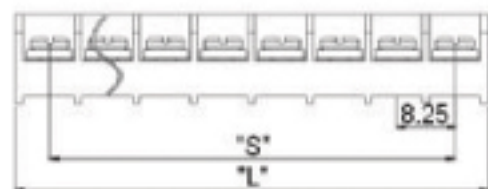

"S"=8.25x(P-1)
"L"=8.25x(P-1)+9.75

订购方式:

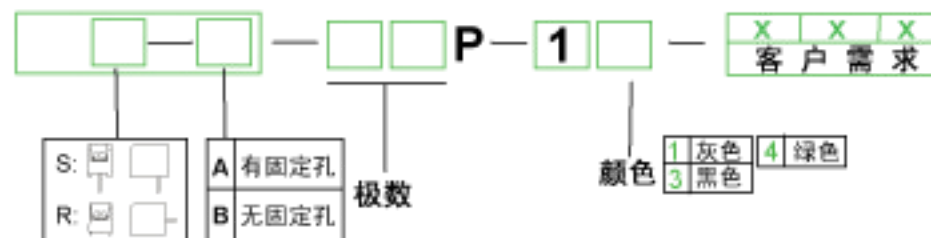

极数	2	3	4	5	6	7	8	9	10	11	12	13	14	15
L(mm)	18.00	26.25	34.50	42.75	51.00	59.25	67.50	75.75	84.00	92.25	100.50	108.75	117.00	125.25
S(mm)	8.25	16.50	24.75	33.00	41.25	49.50	57.75	66.00	74.25	82.50	90.75	99.00	107.25	115.50
极数	16	17	18	19	20	21	22	23	24	25	26	27	28	
L(mm)	33.50	41.75	50.00	58.25	66.50	74.75	83.00	91.25	99.50	107.75	116.00			
S(mm)	24.75	33.00	41.25	49.50	57.75	66.00	74.25	82.50	90.75	99.00	107.25			

mm (INCH)		中国·康伟电子有限公司
NAME		