


Approval	CE	
Electrical	UL	IEC
Standard	600V	800V
Rated voltage	15A	24A
Rated current	28-14AWG	0.2-2.5mm ²
Wire size	5/42.5/2.5mm	
T/W/End plate	38/45.5mm	
Height(NS35:7.5/NS35:15)	8KV/3	
Rated surge voltage/contamination class	10mm	
Stripping length	PA/V-0	
Insulating material/Inflammability class		

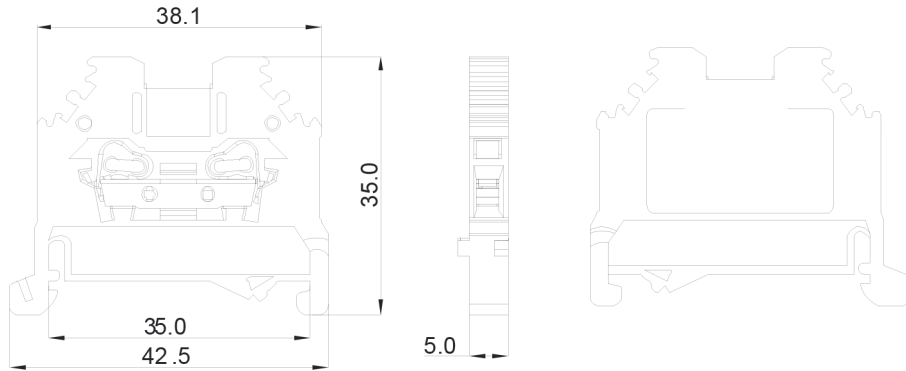

HOW TO ORDER :

	-		P	-	1	-		-	X	X	X
									Customer Request		
Series No.		No.of pole			Color						

1 Gray	4 Green	7 Transp-arent
2 Blue	5 Orange	8 Yellow
3 Black	6 Red	9 white

	 China · Kang Wei electronics co., LTD
 THROANGLE PROJECTION	NAME WD2-2.5